

# SSM

## Submersible Pump

Low residual

**Stream**<sup>®</sup>  
*Sign of Quality*



**Comfortable handle**



**For clean water**




**Non-return valve**

Under manual control, water level can be sucked as lower as to **5 mm**.

**Non-return valve, it can avoid water backflow.**

# Automatic Float Switch

- Working automatically with the water level in auto mode.
- Working continuously to reach the minimum water level in manual mode.

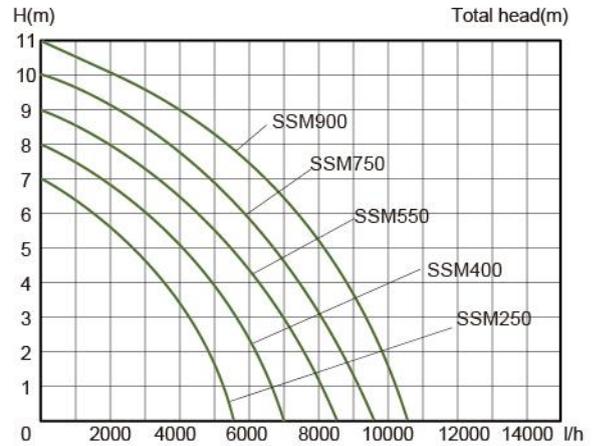

## Technical parameters

Model	Rated Power (W)	Max. Height (m)	Max Pump Rate (L/H)	Max. Grain size (mm)	Residual water level (mm)	Mini working height (mm)
SSM250	250W	7	5500	3	5-8	40
SSM400	400W	8	7000	3	5-8	40
SSM550	550W	9	8500	3	5-8	40
SSM750	750W	10	9500	3	5-8	40
SSM900	900W	11	10500	3	5-8	40



## Applications

Widely used for automatic water supply or irrigation of the house, garden and garden with rain, utility or ground water, swimming pools.

**Stream**<sup>®</sup>  
Sign of Quality

