

SWQU Series

Submersible Free Passage Pumps

Feature



Recessed vortex impeller
50mm solid free-passage
Silicon Mechanical Seal
Stainless Steel Shaft

Working Condition

Max.Immersion Depth: 5m
Max.Liquid Temp: +40°C
Liquid PH Scope: 4-10
Max.Diameter of Solid: 50mm

Application

For heavy-duty applications with soiled wastewater, sewage and stormwater.
For both domestic and professional use.

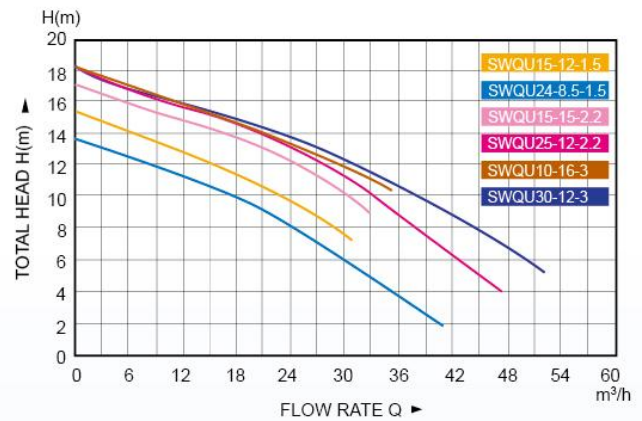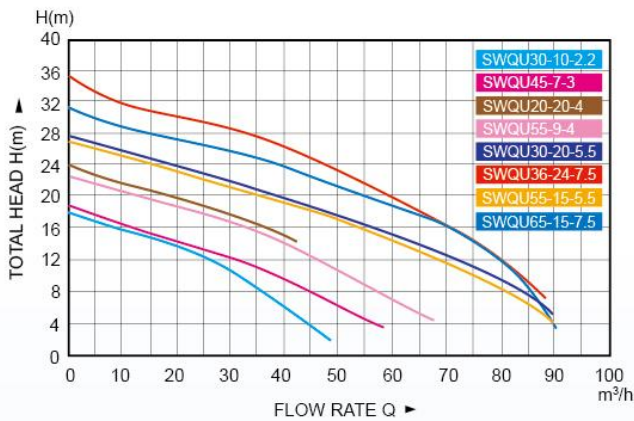

SWQU Series

Model	Voltage V/Hz	Power kW	Discharge mm	Free Passage mm	Q.Rated m³/h	H.Rated m	Q.Max m³/h	H.Max m	GW kg	Dimensions cm
SWQU15-12-1.5	220/50 380/50	1.5	50	50	15	12	31.04	15.46	32.74	58x22x27
SWQU24-8.5-1.5	220/50 380/50	1.5	80	50	24	8.5	40.7	13.8	35.6	58x22x27
SWQU15-15-2.2	220/50 380/50	2.2	50	50	15	15	33.3	17.32	34.61	58x22x27
SWQU25-12-2.2	220/50 380/50	2.2	65	50	25	12	47.77	18.11	35.55	58x22x27
SWQU30-10-2.2	220/50 380/50	2.2	80	50	30	12	47.75	17.67	37.2	58x22x27
SWQU10-16-3	380/50	3	50	50	10	16	35.83	18.19	43.5	63.5x25x29
SWQU30-12-3	380/50	3	65	50	30	12	52.28	18.1	45	63.5x25x29
SWQU45-7-3	380/50	3	80	50	45	7	58.36	18.58	46	63.5x25x29
SWQU20-20-4	380/50	4	50	50	20	20	41.98	23.99	49	69x25x31
SWQU55-9-4	380/50	4	80	50	55	9	68.04	22.31	51	69x25x31
SWQU30-20-5.5	380/50	5.5	80	50	30	20	90.03	27.97	69	72x28x35
SWQU55-15-5.5	380/50	5.5	100	50	55	15	90.03	27.97	71	72x28x35
SWQU36-24-7.5	380/50	7.5	80	50	36	24	88.06	35.06	70	72x28x35
SWQU65-15-7.5	380/50	7.5	100	50	65	15	90.31	31.33	72	72x28x35